

ANALOG AUDIO DEVICES

AUDIO DEVICESANALOG AES72 STAGEBOX









ANALOG AES72 STAGEBOXES





The NA-4I4O-AES72 is a 4-channel (4I/4O) stage-box for transmitting microphone levels, analog line levels, AES3, DMX or even intercom via one single CAT cable. The device has male and female XLRs in the same housing and can be used directly as a splitter for monitoring. An additional etherCON serves as feedthrough and allows further looping of the signals to other devices. A ground lift at each input prevents possible ground loops. In addition, each input connector offers the possibility to invert the signal.





ANALOG AES72

STAGEBOX

Order No.	Description
NA-4I4O-AES72	Analog AES72 Stagebox with 4 Input, 4 Output and 2 AES72/RJ45





NA-4I4O-AES72 / front

NA-4I4O-AES72 / back

ACCESSORIES

FOR LINE I/O TO DANTE® INTERFACE



Order No.	Description
NA-TM-KIT	Trussmount kit (Kit includes 4 cross screws, 4 fixing screws, 2 safety frames, 1 yoke mount)
NA-RC	Removable rubber protection
NA-MB-KIT	Mounting brackets (Kit includes 2 brackets, 2 fixing screws, 2 torx screws and 2 spacers)
NRP1RU-2A	Rack panel



ANALOG AES72SETUP AND APPLICATION



OVERVIEW FRONT

Balanced XLR / unbalanced Jack: 4 x input analog only €



etherCON® chassis for AES72 port


2-way switch for additional settings: Ground lift or phase inversion



OVERVIEW BACK



INPUT & OUTPUT APPLICATION

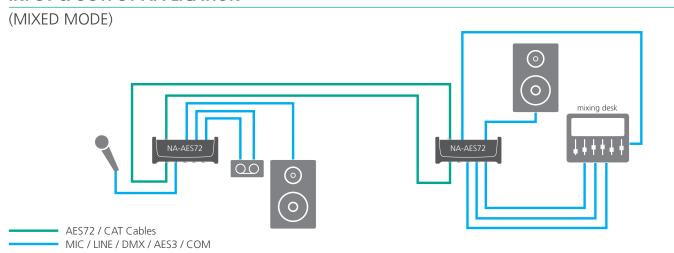





LIECHTENSTEIN (HEADQUARTERS)

Neutrik AG, Im alten Riet 143, 9494 Schaan, Liechtenstein T +423 237 24 24, F +423 232 53 93, neutrik@neutrikgroup.com



www.neutrik.com



A brand of the Neutrik Group